

DTM
AMPLIFIER

NuVo uses D Amplifier™
by Philips Semiconductors

Zones 1-4 Power Amplifier Outputs	
Continuous Average Output Power	30W (15W x 2)
Two channels driven	30-20kHz @1% THD
Rated Distortion (1/2 power)	0.40%
Rated Impedance	6 Ohms
Damping Factor	50+
Frequency Response	20-20kHz

Preamplifier	
Variable output	0-600mV
Fixed output	600mV
Impedance	600 Ohms

Source Inputs 1-4	
Input Impedance	10K
Input Sensitivity for rated power	300mV RMS
Input Overload	3V RMS

Emitter Outputs	
Source Outputs	4
Output Drive Current	100mA
Output Drive Voltage	5V
Source 1 and 2	38kHz/56kHz Selectable
Source 3 and 4	38kHz Fixed

System Specifications	
System On	5V @ 50mA
External Mute	3-12V DC

Power Requirements	
Power Supply	90-260VAC 50/60Hz
Power Consumption all channels driven to full-rated power	140W
Power Consumption average operating conditions	30W
Power Consumption no signal	Less than 10W

Physical Specifications	
Unit Size Millimeters	44H x 432W x 270D
Unit Size Inches	1.75H x 17W x 10.625D
Unit Weight Kilograms	2.95
Unit Weight Pounds	6.5
Keypad Size Millimeters	71H x 41.5W x 32.5D

NuVo reserves the right to change specifications without notice.



www.nuvotechnologies.com
2395 Arbor Tech Drive, Hebron, KY 41048
Phone: 859-817-7200 Toll Free: 866-796-4904

- Simplese system package ships complete with the following:
- Simplese four-source, four-zone system
 - 4 keypads (white, ivory, almond, and black inserts and trim plates for each)
 - 36 pre-printed source buttons
 - 1 LRC1 remote with batteries
 - Allport™ and Allport cable
 - 4 IR emitters
 - REM1U Rack Ear Mounts

SMP-159-0622



SimpleseTM

Four-Source, Four-Zone Audio Distribution System

Simple. Affordable. Stylish.



Get Pure Sound with Generation D Technology

Simplese now incorporates the Generation D technology previously only available on NuVo's higher end Essentia and Concerto systems. Generation D design protocol by NuVo makes pure digital audio a reality for your family, delivering energy conservation, lower heat generation, and clear, precise sound throughout the home.

Customize Sound for Each Room in Your House

Whether you thrill to a pulse-pounding bass or soul-soaring highs, easily adjust equalization settings at the keypad to fit the natural acoustics for each room. Find creating the ideal listening experience, even in open living spaces (such as the living, dining and kitchen area) is as easy as the touch of a button using NuVo's unique grouping feature. Instantly apply group mode to share the same listening selection throughout multiple zones of your choice.

Simple, Seamless Installation

The revolutionary Allport™ wiring system neatly conceals individual connections for each zone while seamlessly integrating the entire system.

Flexibility

As your needs change, Simplese is designed to grow with you, so even if you don't need a complex system now, you will always have the option to add more in the future. Easily expand the Simplese to eight zones of sound or upgrade to NuVo's Essentia or Concerto systems.

Control the Excitement

Simplese is taken to a whole new level of control with the new Learning Remote Control. Manage your whole home audio system and access control for up to six additional devices for an All-In-One control solution. The combinations and possibilities are endless and aren't limited to one zone or even one remote. Add additional learning remotes to zones where added control is desired.

Now RS-232 Compatible

Simplese, in addition to all NuVo whole home audio systems, is RS-232 compatible, allowing easy, seamless integration of your audio system into complete whole home automation systems.



NuVo's user-friendly keypad comes with 4 distinct color options (white, almond, ivory, and black) to fit a wide range of home designs and palettes.

CAUTION: NuVo may cause spontaneous dancing.

Change Rooms. Change Moods.

Simplese gives you the flexibility to send audio from your choice of four sources to any of four different listening zones of your home. That means you can listen to a CD in the kitchen while your spouse listens to XM® satellite radio in the family room, your daughter tunes into a favorite FM station in her room, and your son watches a DVD in your home theater — *all at the same time.*

Generation D Simplese is our most affordable and simple home sound system yet, with the easiest installation, RS-232 compatibility AND the control of the learning remote — all at a price comparable to many single-source systems. NuVo's award winning Simplese is the most feature rich, quality system in its class.

NuVo home audio systems bring the advanced Generation D technology of superior home sound together with a sleek, slim new look, and the simplicity of user-friendly design—all at a price that's easy to live with.


Simplese features:

- Four audio source inputs for multi-source capability, and up to four zones of music (expandable to eight zones)
- 30 watts of power per zone for high-quality sound
- 56 KHz and 38 KHz modulation outputs for better compatibility with more source equipment
- Generation D digital amplifier for cooler operation and higher power output
- Trim-line, 6 1/2 pound chassis takes up less vertical space in rack
- RS-232 serial port for easy integration with home automation systems
- **NEW** Learning Remote for control of up to six additional devices
- Unique Allport™ wiring system means fewer wires to clutter installation
- All at the same MSRP of our original Simplese of \$999.00

Home never sounded so good.



**Simplese comes complete with all necessary components for installation, with the exception of speakers, wire, and audio source equipment.*

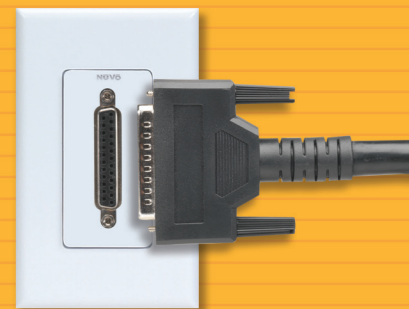

The revolutionary Allport™ wiring system neatly conceals individual connections.

NUVO®

The Sound of LiVing.