

# Digital HD Media Player

# SRK-1080P-C


## Full HD WMV9 Digital Signage

**Supports Multiple Display Zones (includes Movie, Picture and Scrolling Text Bar)**

**Compatible with Windows Media Player 11**

**Supports FTP Auto Download Function**

**Supports HTTP Control Function**

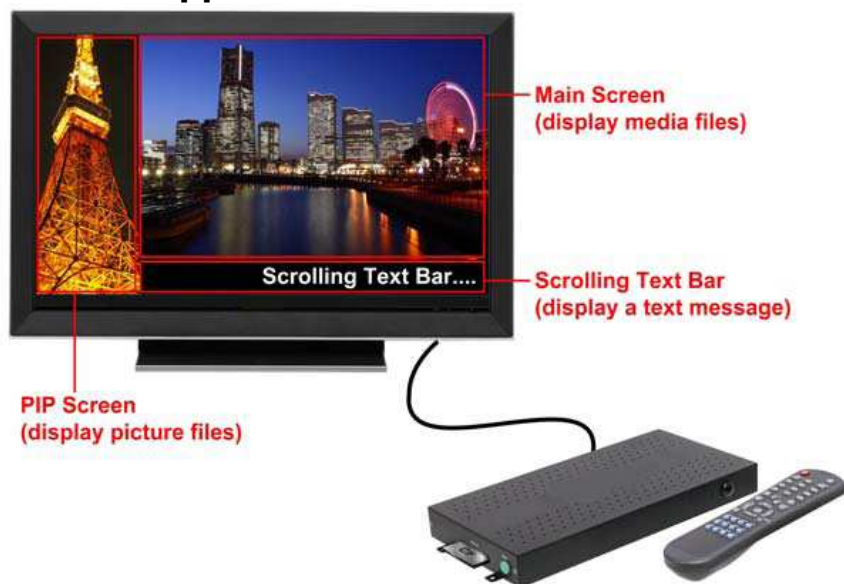

## INTRODUCTION

The Sirkom SRK-1080P-C is a digital media player that plays movies, music, digital picture and WMV9 from CF memory card without a computer. The Sirkom SRK-1080P-C supports High Definition movie hardware decode acceleration, presents for you the smoother and clearer picture, it supports high resolution video output such as 1080P / 1080i / 720P for movie theater quality video on a big screen. By connecting to Video, S-Video, Y.Pb.Pr, VGA (resolution up to 1360 x 768), HDMI (1920 x 1080P) and Audio, you can play picture, movie and music on any display device.

What's more, the Sirkom SRK-1080P-C supports multiple display zones, you can play movie, picture and scrolling text on the screen simultaneously. The scrolling text displays an animated text message on a bar on bottom of your screen, the information of your product can catch the customer's eyes easily.


The Sirkom SRK-1080P-C can connect to a wired network at speed up to 100Mbps. This function provides you with maximum throughput for sharing and transferring digital media.

## FEATURES

- Supports multiple file formats : Music, Picture, Movie and HD WMV9.
- Supports Video, S-Video, Y.Pb.Pr, HDMI, VGA and Audio output.
- HD Y.Pb.Pr output supports resolution : NTSC Mode(60Hz) : 480P/ 720P/ 1080i.  
PAL Mode(50Hz) : 576P/ 720P/ 1080i.
- HDMI Output : 480P/ 720P/ 1080i/ 1080P.
- VGA output supports resolution : 640x480/ 800x600/ 1024x768/ 1280x1024/ 1360x768.
- Supports RS-232 port for computer control with ASCII command (play, stop, pause...etc).
- **Supports Multiple Display Zones: Displays the movie, picture and scrolling text on the screen simultaneously.**
- **Touch-Sensor Buttons Function (optional):**
  - Press one of the touch-sensor buttons, the SRK-1080P-C will play the corresponding file automatically.
  - The number of touch-sensor buttons can be customized to 12, 24 or 36 for OEM project.
  - Used with various operating environment (glass, plastics and acrylic material, except metal material), the thickness supports 3mm -5mm, and it can be customized to 5cm for OEM project.
- **PIR Sensor Function (optional):**
  - After sensing approaching subjects, the SIRKOM SRK-1080P-C will play the files automatically.
  - Sensing distance is up to 3 meters with an angle of 45°.
- **Schedule Function (optional):** The SRK-1080P-C will auto play the designated file at the specify date.
- Connect using an Ethernet network cable at up to 100Mbps.
- The source of HD WMV9 MP@HL (Main Profile / High Level) supports resolution up to 1920x1080 (1080P) and the maximum bit rate is 12Mbps.
- Supports CF memory cards. (Suggest using the high speed (150X) CF card)
- **Supports HTTP Command function.**
- **Supports Auto Key Lock function.**
- **Exports the Configuration Value:** You can export the configuration value to the CF card. The configuration value can be modified on your PC, and can be applied to the SRK-1080P-C or others.
- **Compatible with Windows Media Player 11:** Play media files stored in a network computer.
- **Supports FTP Auto Download Function:** Connect to Remote FTP server and download data to the CF card automatically.
- **Supports Download Pause / Resume Function:** Continue unfinished downloads upon next session.
- Embedded FTP Server.
- Supports NTP Network (G.M.T) Timer. You can also set the system time manually.
- Supports Universal Plug and Play (UPnP) and DHCP.
- **Supports SLIDE SHOW Function** (interval time with 10/ 15/ 30/ 60 seconds).




**HTTP Command Function**

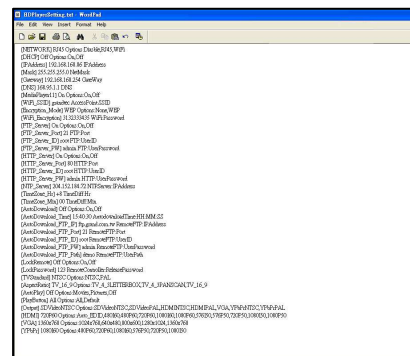

**Exports the Configuration Value  
(modify on your PC)**

## CONNECTION

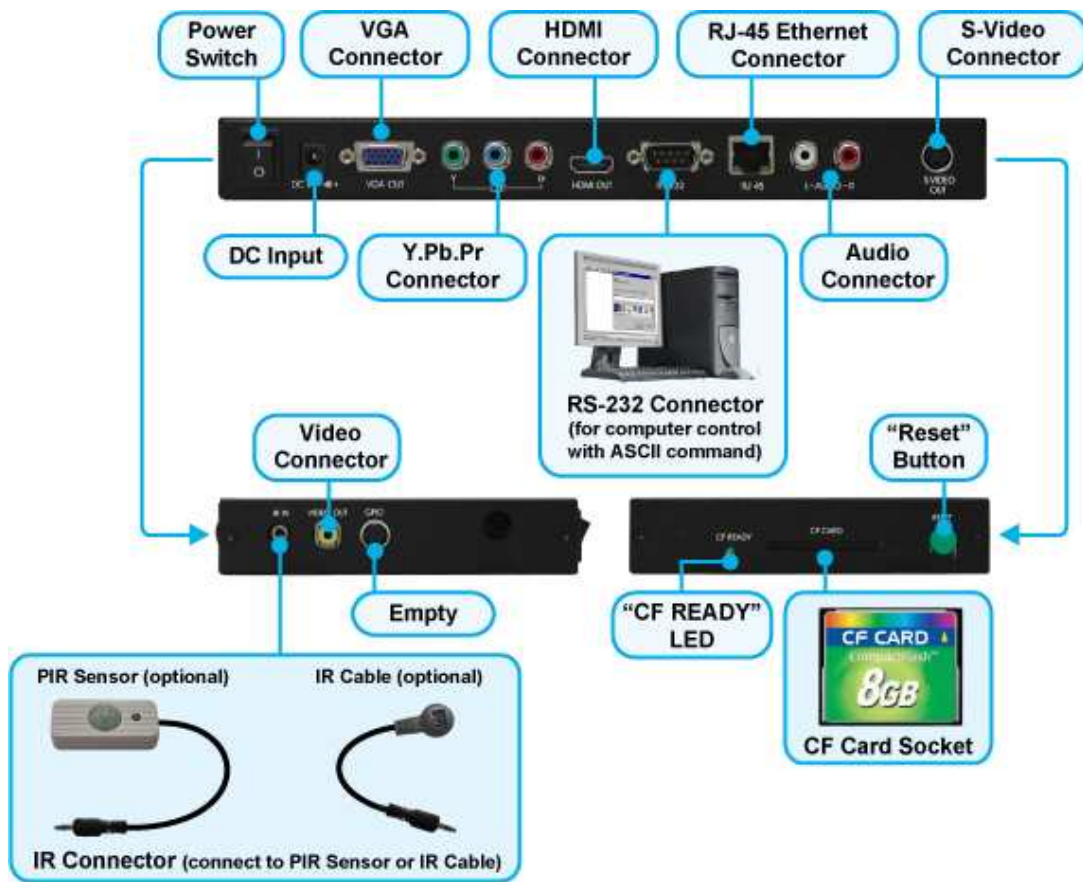


## OPTIONAL FUNCTIONS


### Schedule Function

- The SIRKOM SRK-1080P-C will auto play the designated file at the specify date.
- There are two modes: "Basic Schedule" and "Advance Schedule".
  - Basic Schedule: You can select files that you want to play and set up the play times of each file.
  - Advance Schedule: You can select the files that you want to play, and also can set up the play times and the initial and end time of each file.

#### Basic Schedule

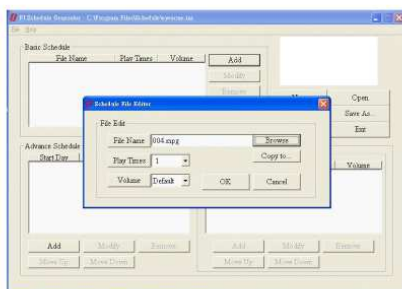


#### Advance Schedule

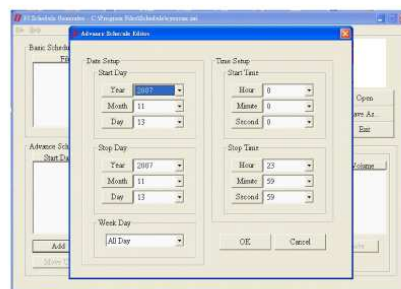

## OPTIONAL AUXILIARY EQUIPMENT


### Play Button Box (SIRKOM SRK-BB)

- The Play Button Box (SIRKOM SRK-BB) supports up to 12 play-button inputs.
- Press one of the play buttons to play the corresponding file.

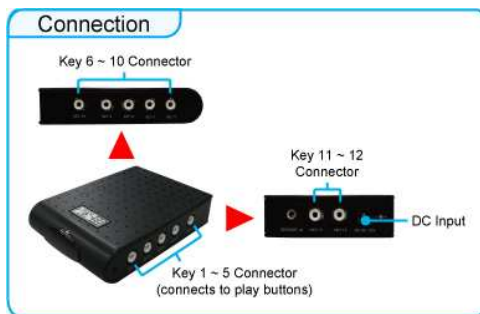


### IR Cable

- The IR cable (1 meter) is an external remote control receiver.

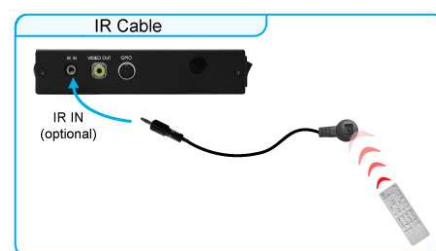

### PIR Sensor (SIRKOM PIR)

- The PIR sensor is not only a motion detector, but also a remote control receiver,
- **Motion Detector**
  - After sensing approaching subjects, the SIRKOM SRK-1080P-C will play the files automatically.
  - Sensing distance is up to 3 meters with an angle of 45°

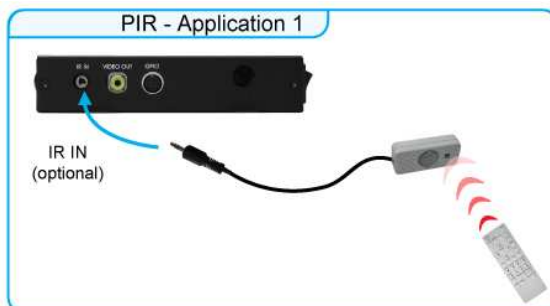

### Touch-Sensor Buttons

- There are two modes for transmit signal to the SIRKOM SRK-1080P-C: **Wired** and **Wireless**.
- Press one of the touch-sensor buttons, the SRK-1080P-C will play the corresponding file automatically.
- **Wire Mode:** The distance between SIRKOM SRK-1080P-C and Touch-Sensor buttons can be around 1.5M.
- **Wireless Mode:** The sensing distance is up to 3M.

