

### Key Features

- LCD TFT public display
- 116,8 cm/46" diagonale
- ultra narrow bezel housing
- professional media panel
- 1366 x 768 resolution
- 3000:1 high dynamic contrast
- 700 cd/m<sup>2</sup> high brightness
- 178° (h/v) wide viewing angle
- array of connectors
- built-in video wall function
- portrait/landscape orientation
- auto cooling system
- remote control & maintenance






### D468FL – Ultra Narrow Bezel

Since the mid-90s, the name HYUNDAI has been synonymous with the design and production of state-of-the-art display technologies. Advanced devices offering sophisticated design and supreme image quality – with "built-in" future-proofing.

Coming with an ultra narrow bezel design, HYUNDAI IT Digital Signage Displays are dedicated to build video walls. Combined with the cutting edge function – which allows displaying the full picture content – the smart design of the HYUNDAI public displays ensures a maximum screen area with a minimum of view-able interruptions.



Display Panel	Panel Technology		LCD   S-PVA TFT
	Screen Size (inch   cm)		46"   116,84
	Active Display Area (mm)		1018.35 x 572.54
	Number of Pixels		1366 x 768 (WXGA)
	Aspect Ratio		16 : 9
	Display Colors		16.7 Mil.
	Brightness (cd/m²)/(typ)		700
	Contrast Ratio		3000 : 1
	Response Time (ms, GTG)		8
	Viewing Angle (H/V)		178°/178°
	Life Time		50,000h
	Housing		black powder coated metal
	Resolution	Monitor   DTV (without tuner)	
Connectivity & Control	Input	VGA (15pin D-Sub)	1
		HDMI	1
		Composite   Component (BNC)	1   1
		Audio: PC   Component   Composite	1   1   1
		RS232C	1
	Output	VGA (15pin D-Sub)	1
		DVI (Connected type HDMI)	1
		Composite   Component (BNC)	1   1
		RS-232C	1
		Speaker (ready)	1
	Integrated Video Wall Function (Multi-Screen)		HDMI, VGA (15pin D-Sub), Component (BNC), Composite (BNC)
Power Requirement	Input Voltage	100 – 240VAC	
	Consumption (typ) (W)	260	
	DPMS (W)	2	
Auto Cooling System		Yes (1EA)	
Auto Power Control (DPMS)		yes (optional set-up)	
Features/Options	Anti Reflection Coating		no
	Tempered Glass		no
	Optical Bonding		no
	Touch Screen		no
	Transflective		no
	Auto Brightness Control		option
Mechanical	Dimension (mm)	Set   Packed (W x H x L) (mm)	1025.6 x 579.8 x 108.2   1240 x 796 x 322
		Bezel Size (U/D/L/R) (mm)	4.6/2.7/4.6/2.7 (Open Frame)
		Wall Mounting Hole (W x H mm)	600 x 200
	Weight (kg)	Set   Packed (kg)	26.0 kg   30.5 kg
Approvals	EMI/EMC   Safety		FCC, CE   cTUVus, TUV, CB
Environmental Conditions	Temperature   Humidity		0° – 40°   20% – 80%
Accessories			Power Cord, Manual, HDMI Cable, VGA Cable, Remote Control
Warranty			standard: 2 years, less than 18 hours usage per day
EAN Code			880-909374-645-9

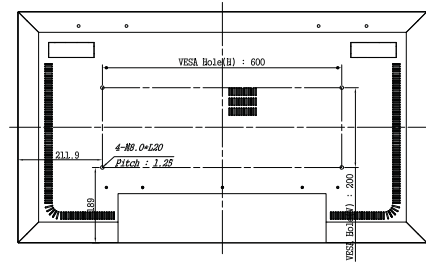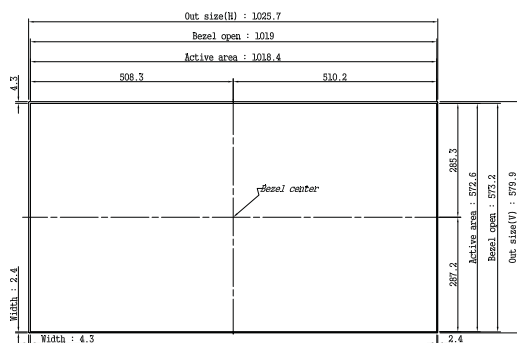

Mechanical Drawing

Technical details are subject to change without further notice. Errors excepted. Version: as of September 2010.