

Retail Tablet 3G

UID0354-XX1

- S
- M
- L
- XL
- XXL

The i DISPLAY Retail Tablet M is an Android based, interactive digital display with hardware and software specially designed for retail and commercial use. The i DISPLAY Retail Tablet M is a robust yet slimline unit that features a 10.1" capacitive multi touch screen, front camera and embedded Wi-Fi and 3G to allow remote automatic connection to content management system (CMS). The i DISPLAY Retail Tablet M features include content auto-play, auto-copy, auto-detect and password protection functionalities. Battery life is maximized due to the internal and external batteries and the stand-by mode. A VESA mounting system on the back enables various mounting solutions for the retail environment. Setting buttons and sockets are placed at the back of the device to prevent customers from modifying the preferred settings. The i DISPLAY Retail tablet M can connect to external hardware such as a coupon printer, barcode scanner and can run a multitude of Android applications to reinforce marketing messages and promotions within the retail space. The i DISPLAY Retail Tablet M offers the ability to work in either landscape or portrait mode, comes with a variety of fixtures, and is the ideal digital point of sale display for retailers looking for an affordable interactive digital signage solution that fits nicely in any location and provides great visibility from a distance!



Capacitive Touch Screen



Built for Retail

i DISPLAY+

Web Based CMS



Variety of Fixtures



Energy Saving Standby Mode

WiFi 3G


3G and Wi-Fi Enabled

Panel Information	
Screen Size	10.1"
Touch Screen Type	High quality capacitive touch screen
Active Area	222.72(W) x 125.28(H)
Pixel Pitch	0.2175(H) x 0.2088 (V) mm
Max Resolution	1024 x 600
Brightness	300 cd/m2
Contrast Ratio	500
Horizontal Viewing Angle	3 o'clock = 60° 9 o'clock = 60°
Vertical Viewing Angle	12 o'clock = 30° 6 o'clock = 50°
Aspect Ratio	16:9

Playback Functions	
Functionality	Supports auto play of movie/ flash swf file/ APK/ JPEG Support Standby mode Supports content management system Supports up to 20 extra push buttons and motion sensor
Video Formats	MKV/ MPEG4/ AVI/ FLV/ RMVB/ MOV
Image Formats	JPEG, BMP, PNG

Audio Outputs	
Mono/ Stereo	Stereo
Audio Code	MP3/ APE/ FLAC/ AAC/ OGG

Recommended Video Format	
Resolution	1920X1080
Video Format	XVID (.AVI)
Frame Rate	23.976 fps
Bit Rate	4000 Kbps
Audio code	MP3 120Kbps

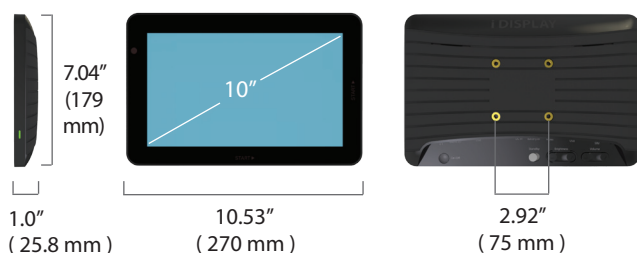

Power	
Power Input	110V/240V
Power Output	9V/2A , with Battery inside
Power Consumption	18W (max)
Power Source	Internal battery 1400mAH, external battery, Power supply cable 2m
Battery Charging Time	2 hours
Operation Time in Stand By Mode	15 days with external 4 Cell R. Battery 21 days with D cell battery clip

General Information	
Front Facing Camera	2 megapixels (1600x1200), Focus: fixed
Size (W x H x D)	270 x 179 x 25.8 mm
Weight	810 g
Operation Temperature	0°C to 40° C
Relative Humidity	40% - 70%
Internal Memory	4GB
Connectivity	Wi-Fi 802.11 b/g/n 3G WCDMA (CDMA 2000 optional) Bluetooth RJ45 compatible
Color	Black / White (other colors optional)
Input Ports	USB (*2) / Micro SD / 3G SIM / Micro HDMI / Earphones / I2C (PB and MS) / DC in/ On standby switch / Home button / Volume button / Brightness button
Approvals & Certifications	ROHS, CE / FCC

Packing	
Product Carton Size	385 x 210 x 60 mm
Master Carton Size	402 x 198 x 232 mm
Master Carton Weight	4 kg
Units Per Master Carton	3 pcs

Accessories	
Mounting	Mounting adaptor
Other Accesories	Counter Display, Floor Display, Table Bracket, Shelf Bracket, Rotating Shelf Bracket, Wall Bracket, Connect Box, 9v External battery, Single Docking Station, Multi Docking Station, Push Button, Motion Sensor

Specifications are subject to change without prior notice. Contact: support@i-display.com

i DISPLAY
Interactive Digital Displays