


47WV30

MULTI-VISION DISPLAY

- Super Narrow Bezel (seam size : 6.9mm)
- Infinitely Expandable Multi-vision Solution
- Various Interface for Daisy Chain
- Shine-out Film Adopted
 - Great picture quality at any place,
even under the sunlight and lightings
- LED BLU Adopted
 - Low Power Consumption
 - Eco Friendly
- Perfect Compatibility with LG SuperSign (NC1000)




PANEL	Screen Size Aspect Ratio Native Resolution Pixel Pitch (mm) Brightness Contrast Ratio Viewing Angle (°) Color Depth Response Time Surface Treatment Max Input Resolution	47" 16 : 9 1366 X 768 (HD) 3,147,264 700 cd/m ² 1300:1, 500,000:1 (DCR) 178 x 178 16.7M (8-bit) 9 ms (G to G) Hard coating (3H), Anti-glare 1366 X 768 @ 60Hz (RGB, HDMI, DVI)
VIDEO	Recommended Resolution H-Scanning Frequency V-Scanning Frequency Pixel Frequency Sync Compatibility Video Input Picture Mode Color Temperature	1366 X 768 @ 60Hz (RGB, HDMI, DVI) 31 ~ 61kHz (RGB, HDMI, DVI) 60~75Hz (RGB) / 60 Hz (HDMI, DVI) 80 MHz (RGB, HDMI, DVI) Separate / Composite / Digital RGB, HDMI / DVI User/High/Middle/Low User/ Cool/ Warm/ Medium/ Warm2
REAR INPUTS	Component Video PC Input via 15-Pin Sub-D Composite Video Input / Output Audio Output Audio Inputs HDTV Formats PC Formats HDMI / DVI with HDCP RS-232C Input / Output RJ-45 USB Audio Jack Built-in (No Analog) Discrete IR Input Auto Volume Balance Audio Power Speaker On/Off Sound Mode	Hi-Res 1 / 1 1 / 1 1 PC Sound 480i / 480p / 576i 576p / 720p / 1080i Auto Scaling to HD Yes No 1 / 1, Female-to-Female Crossed Type No - Yes Yes No Yes 20W (10W x 2) Yes No User / Standard / Music / Cinema / Speech
SPECIAL FEATURES	NC2000 (Optional PC) Compatible New Temperature Sensor Tile Mode Image Zoom Source Selection Brightness/Contrast Position Set-up ISM Method Advanced Auto Power/Source Memory Key Lock Color	No Yes No Digital (DVI, DVI) / Analog (RGB / Component / AV) Yes H / V Language (English / French / Spanish / Italian / German / Portuguese / Korean / Japanese / Russian) No Gamma/Film mode / Blacklevel/Noise Reduction Yes Yes Black 4.2 / 27 mm 1046.8 X 913 X 516 28kg - 1126 X 285 X 690 -
POWER	VESA™ Standard Mount Interface (mm) Power Supply Power Type Power Switch Power Consumption Power On Power Off	800 X 400 100-240V~, 50/60Hz Built-in Power Yes 220W 1W 0.5W
STANDARD CERTIFICATION	Safety EMC	UL / cUL / CB scheme / TUV FCC / VCCI / CE / C-Tick / KCC / EPA

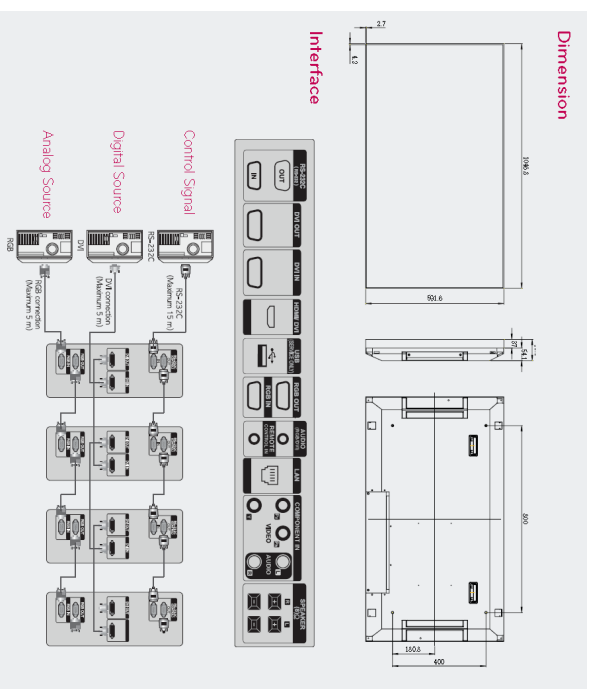

The Bigger Screen & the Slimmer Bezel

Now (47WV30)

Before (M4630C)&Competitor

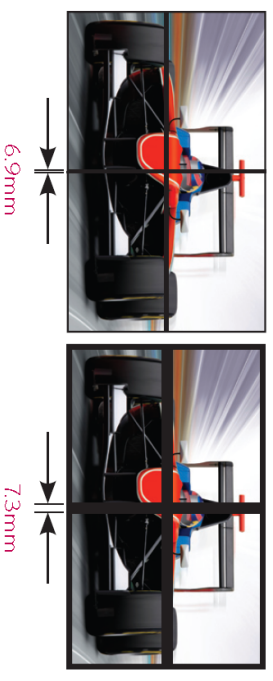

The seam size is only 6.9mm and each screen size is 47". You can make your own multi-vision with the bigger screen and the slimmer bezel.

Shine-Out

Outdoor Exclusive Panel)




- Surface Reflectance : 0.5%
- Contrast Ratio: 400:1 (4K Lux)
- Color Gamut: 71% (4K Lux)

External Light Source



- Surface Reflectance : 4.0%
- Contrast Ratio: 80:1 (4K Lux)
- Color Gamut: 68% (4K Lux)

Light from B/L



Perfect fit for window display and exhibition by reflecting away the lights for best image visibility and clearer display under direct sunlight & lightings than conventional display.