

Digital Chalkboard and Digital ChalkBoard with Floor stand

Digital Chalkboard combines the popular catering board with a screen with integrated SMIL player and Software, in a pre-configured package for immediate use.

The timelessly elegant design fits perfectly in the environment. The latest advertising technology in combination with a standard whiteboard accepted as standard in restoration.


The alternative to the standard digital blackboard is the model with floor stand.

Technically identical to the previous one, but designed for others applications, this variant allows you to welcome your guests and present the highlights of the day in the reception area. While on the board you can see the menu, the images or videos on the screen attract public attention. This unique solution combines two worlds and makes it easier to update the digital advertising..

Updatable through SMILSignage CMS



iPhone App

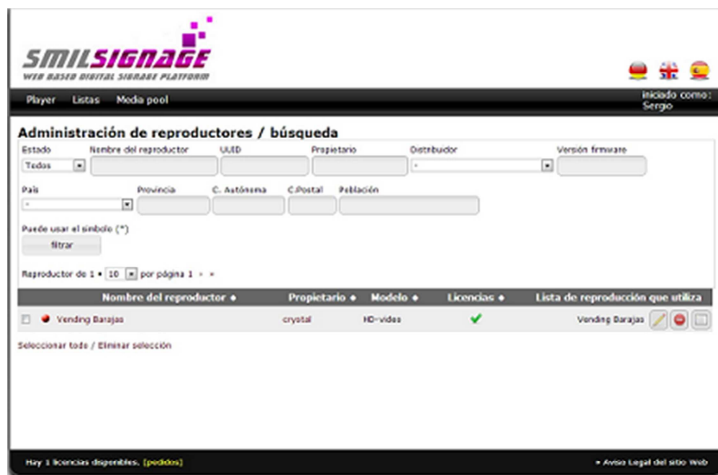

Administración de reproductores / búsqueda

Estado: Todos | Nombre del reproductor: | UUID: | Propietario: | Distribuidor: | Versión firmware: |

País: | Provincia: | C. Autónoma: | C.Postal: | Población: |

Puede usar el símbolo (*)

Reproductor de 1 a 10 por página 1

Nombre del reproductor	Propietario	Modelo	Licencias	Lista de reproducción que utiliza
<input type="checkbox"/> Vending Barajas	crystal	HD-videos	✓	Vending Barajas

Seleccionar todo / Eliminar selección

Hay 1 licencias disponibles. [podrás]

Aviso Legal del sitio Web



Technical Specifications

Dimensions and weight

Display size 10.1 "
Main Unit (W x H x D): 300x900x45 mm
Weight: 6.5 kg
Display size 15.6 "
Main Unit (W x H x D): 500x1200x400 mm
Weight: 15 kg
Also option in 22.5" (without player)

Supported Media

Image: JPEG baseline, up to 12 Megapixels
Audio: MPEG L2 or MP3, up to 320 Kbps
Video: MPEG-1 or MPEG-4 ASP, 2Mbps
(Recommended content with 720x400 resolution and a 16:9 aspect ratio)

Note: MPEG-2 video is NOT supported

Functions of the digital scoreboard

The auto-play function starts playback automatically scheduled content after turning the AC Power
Automatic Error Correction with built watchdog timer
The real time clock keeps time up to a year without electricity
The Automatic Network Time Protocol (NTP) provides a synchronization of time and date
Playback Control
4 programmable buttons
W3C SMIL 3.0-instructions (subset)
Channel events for real-time clock
Network playlist synchronization
Direct USB sync
Content Management Manager Express
Launch Utility
Solutions for Third Party Products (optional license)

Display and sound

10.1 "TFT LCD with high aspect ratio
Maximum brightness of 300 nits
Native Resolution 800 x 480
Built in stereo speakers 2 x 2W
15.6 "TFT LCD 16:9
Maximum brightness of 300 cd / m²
Native Resolution 1366 x 768
Built in stereo speakers 2 x 2W

Mounting Options

Built-in VESA-compliant brackets 75 x 75 mm

Local storage

Local internal 2GB memory
(About 120 minutes maximum quality video or thousands of still images)
Memory card slot: Secure Digital (SD / SDHC)
Card Capacity: Up to 8GB (SDHC)
Network connectivity and I / O port
Wi-Fi: IEEE 802.11 b / g
Wi-Fi Security: WPA/WPA2, TKIP / AES
Ethernet: RJ45 port with USB dongle (optional)
USB storage host (Type A)
Stereo audio output jack 3.5 mm

Included Accessories

Software CD
QuickStart Guide
AC power adapter
Display Stand
Optional accessories
Ethernet Adapter USB to RJ45 PDE-100
VESA MIS-D75 Displayst? Direction

Power supply

Ratings: 12 V / 1.5 A
AUL / CE / PSE certified power supplies

Environmental Data

Operating temperature: 0 to 45 ° C
Humidity: 5 to 85% at 40 ° C, noncondensing

Certificates

CE / FCC / RoHS

Warranty

1 year on parts and labor

