
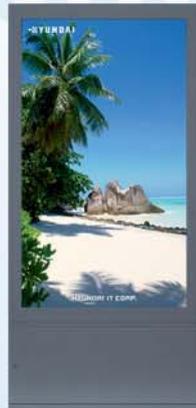


Digital Signage

Bus Station

Outdoor

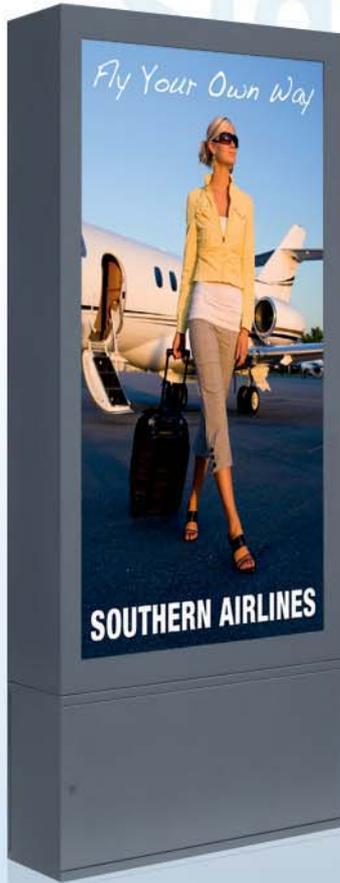

Key Features

- 46" LCD TFT public display
- out-of-home media panel
- transfective panel technology
- CCFL backlight unit
- 2400 - 3000 cd/m² high brightness
- 1366 x 768 resolution
- 1.000.000:1 high dyn. contrast
- 178° (h/v) wide viewing angle
- anti-vandal bonding glass
- anti-graffiti protection (option)
- anti-refelction coating
- all-weather proof (IP 65 certified)
- auto brightness control
- auto heating & cooling system
- remote control & maintenance


H466ST – Outdoor Stand-Alone

Since the mid-90s, the name HYUNDAI has been synonymous with the design and production of state-of-the-art display technologies. Advanced devices offering sophisticated design and supreme image quality – with "built-in" future-proofing.

HYUNDAI IT's outdoor displays are representing state-of-the-art display equipment for any outdoor environment. Meeting high industrial standards they are providing a high degree of operational reliability and high quality image, which are important preconditions for attracting successfully the attention of the audience.



Display Panel		Screen Size	46" 116,84
		Panel Type	S-PVA
		Active Display Area (mm)	1018.35 x 572.54
		Number of Pixels	1366 x 768 (WUXGA)
		Pixel Pitch	0.7455(H) X 0.7455(V)
		Aspect Ratio	16 : 9
		Display Colors	16.7 Mil
		Brightness (cd/m²)/(typ)	2400 - 3000 (ar 80K lux)
		Contrast Ratio (dynamic)	1.000.000 : 1
		Response Time (ms, GTG)	8
		Viewing Angle (H°/V°)	178°/178°
		Life Time	50,000h
		Backlight type	CCFL
		Connectivity & Control	Input
HDMI	1		
Power Requirement	Operating Voltage		100 – 240VAC
	Consumption (typ) (W)		450 (Operating heating system, with PC: max. 2.5 KW)
	Consumption per nits (W)		0,3
Auto Cooling System	Yes		
Auto Heating System	Yes		
Auto Brightness Control	Yes		
Feature	Anti-Vandal Glass	Yes (thickness : 13mm (glass : 5TX2))	
	Anti-Graffiti Surface	Option	
	Auto Brightness Sensor	Yes	
	Touch Screen	No (option: model H460SLI)	
Mechanical	Dimension (mm)	Set (W x H x L) (mm)	770 x 1950 x 250
	Weight (kg)	Set Weight (kg)	125
	Surface treatment	Surface treatment	Powder coated, Powder salty
	Accessories	Mounting (Bottom mounting)	M12 wedge anchor (8 pcs)
Environmental conditions	Max Temperature operational (°C)	50	
	Min Temperature operational (°C)	-40	
	Max Temperature storage (°C)	60	
	Min Temperature storage (°C)	-20	
	Humidity (non-condensing) (%)	20 – 80	
Approvals	EMI/EMC	FCC, CE	
	Safety	cTUVus, TUV, CB	
	Ingress Protection	IP55 – IP65	
EAN Code			880 909 374 673 2

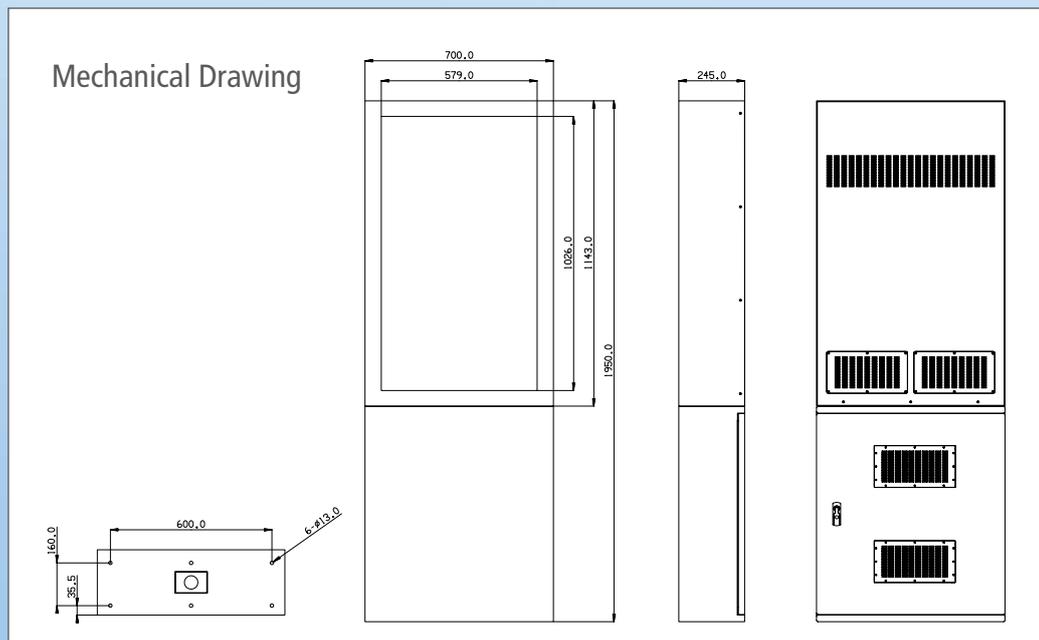

Technical details are subject to change without further notice. Errors excepted. Version: as of April 2010